WORK AT INTERSECTION -
T-INTERSECTION OF TWO-WAY STREET AND ONE-WAY STREET
Plan 24A4TOW City

USE THIS PLAN FOR ALTERNATING ONE WAY TRAFFIC
WHEN THE UNOBSTRUCTED ROADWAY AREA OUTSIDE
THE WORK ZONE IS LESS THAN TWENTY FEET WIDE.

LOCATION _____

USE THIS PLAN FOR ALTERNATING
ONE WAY TRAFFIC WHEN THE
UNOBSTRUCTED ROADWAY AREA
OUTSIDE THE WORK ZONE IS LESS
THAN TWENTY FEET WIDE.

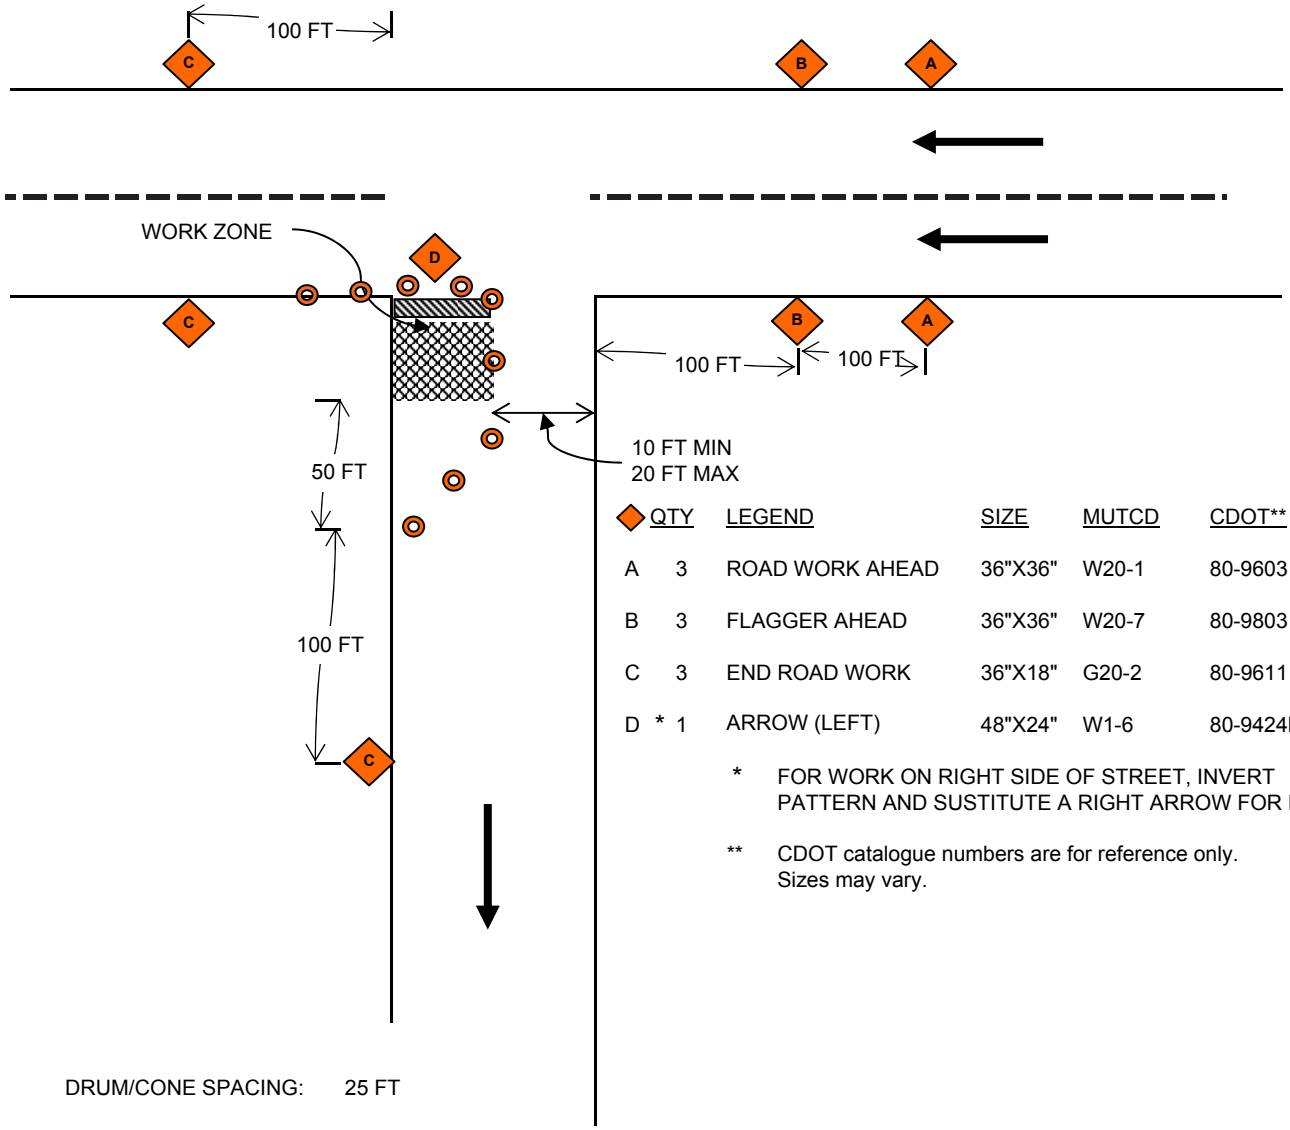

QTY		LEGEND	SIZE	MUTCD	CDOT**
A	3	ROAD WORK AHEAD	36"X36"	W20-1	80-9603
B	3	FLAGGER AHEAD	36"X36"	W20-7	80-9803
C	3	END ROAD WORK	36"X18"	G20-2	80-9611
D	* 1	ARROW (LEFT)	48"X24"	W1-6	80-9424L

* FOR WORK ON RIGHT SIDE OF STREET, INVERT PATTERN AND SUSTITUTE A RIGHT ARROW FOR D

** CDOT catalogue numbers are for reference only. Sizes may vary.

DRUM/CONE SPACING: 25 FT

SIGNS: PER SPECIFICATION OF THE M.U.T.C.D.
WARNING SIGNS SHALL HAVE FLORESCENT
ORANGE SHEETING WHERE REQUIRED.

DENOTES TRAFFIC DRUM OR TRAFFIC CONE - MIN. HT. 40"

DENOTES TRAFFIC SIGN

DENOTES TYPE III BARRIER

NTS